


| Frequency range | Channel A: 694-703 MHz |
|--------------------------|------------------------|
| | Channel B: 748-758 MHz |
| Number of channels | Dual channel |
| Maximum deviation | + 15KHz |
| In the letter | exercise than >100dB |
| Comprehensive distortion | less than 0.02% |
| Frequency stability | F+ 0.03% |

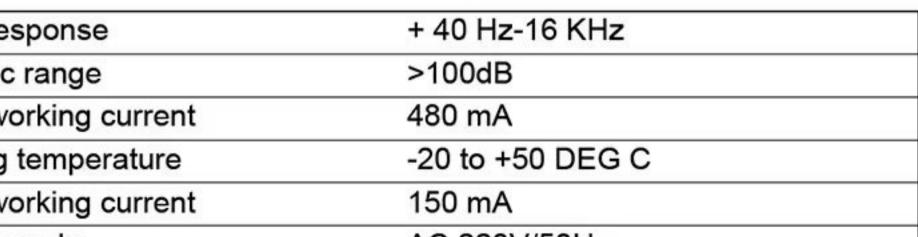

| Audio response | + 40 Hz-16 KHz | |
|-----------------------|------------------|--|
| Dynamic range | >100dB | |
| Rated working current | 480 mA | |
| Working temperature | -20 to +50 DEG C | |
| Rated working current | 150 mA | |
| Power supply | AC 220V/50Hz | |
| | | |