



PROEURO TECH
PERFORMANCE SOUND

KF-10SE



PMPO	MODEL NO.	N.W
1000W	KF-10SE	14.5KGS

RGB LIGHTING:

DEIVERS: 10"WOOFER x2 + 2"TWEETER

BATTERY: 12V/7500MAH LEAD-ACID BATTERY

PACKAGE SIZE: 390x380x940MM


PRODUCT SIZE: 360X340X840MM



F-15D

MULTIFUNCTIONAL DSP ACTIVE SPEAKER

ENJOY THE DESIRED EFFECT OF MULTI-DIRECTIONAL ADJUSTMENT OF LIFE

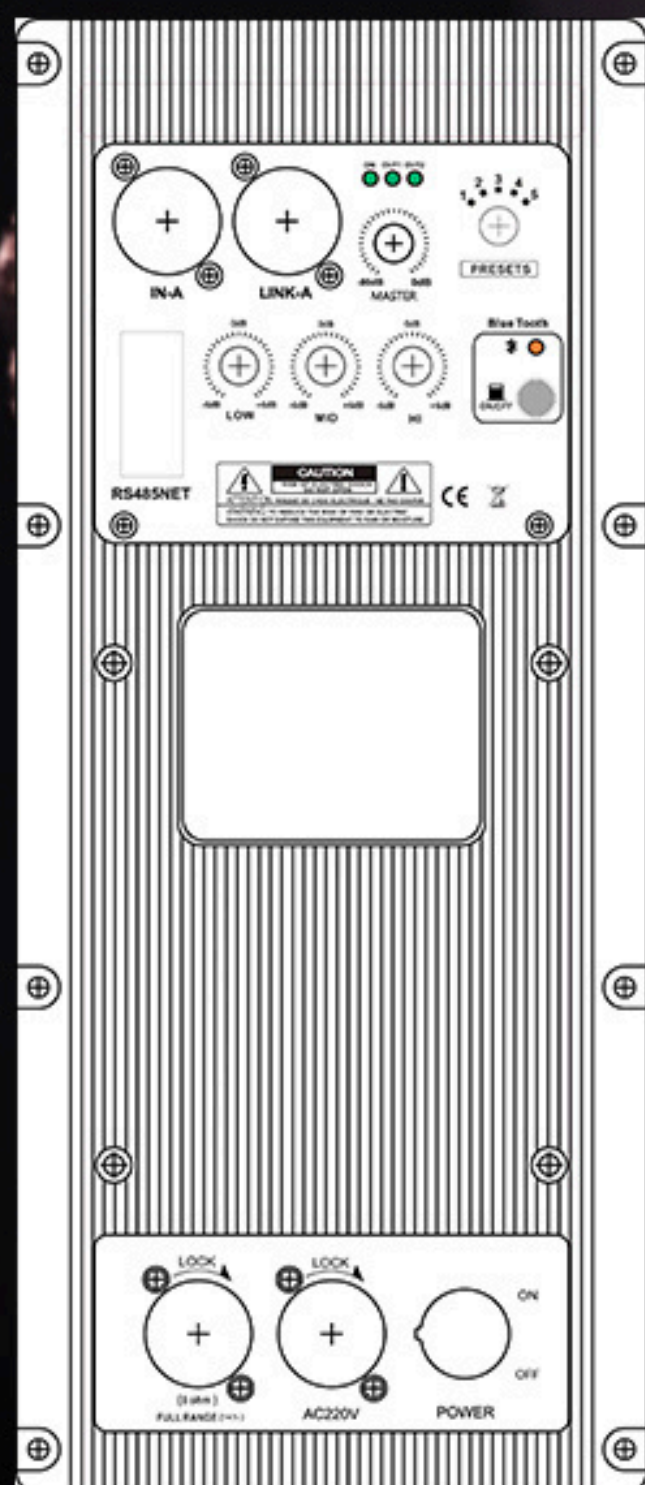

EQUILIBRIUM
REGULATION



BUILT
IN DSP



MODULATION



INSTRUMENT
INPUT



MICROPHONE
INPUT

SYSTEM TYPE:

1 * 15 INCH ACTIVE DSP TWO DIVISION
FULL FREQUENCY SPEAKER

FREQUENCY RESPONSE:

48HZ-20KHZ (- 3DB)

SENSITIVITY (DB):

102DB / 1W / 1M

MAXIMUM SOUND PRESSURE SPL@1M:

132DB (RMS) 138DB (PEAK)

COVERAGE ANGLE:

60 ° HORIZONTAL AND 40 ° VERTICAL



PROEURO TECH
PERFORMANCE SOUND

KF-12SE



PMPO MODEL NO. N.W
1600W KF-12SE 24KGS

RGB LIGHTING:

DEIVERS: 12"WOOFER x2 + 3"TWEETER x2

BATTERY: 12V/12A LEAD BATTERY

PACKAGE SIZE: 420x400x1020MM

PRODUCT SIZE: 350X365X920MM





PROEURO TECH
PERFORMANCE SOUND



KF-15PRO

PROFESSIONAL SPEAKER SERIES

FUNCTIONAL OVERVIEW:

Professional 8-channel input, built-in high-efficiency Class D power amplifier, incredibly flat frequency response, digital display, USB player with recording function,Built-in 32-BIT DSP EFFECT, 48V phantom power, built-in Bluetooth, built-in USB wireless microphone input interface, XLR parallel output interface, can expand the audio system

Model	15"SERIES
Driver Quantity:	15"×1(LOW) 1×25mm(High)
Rated output power:	250W~700W
Output Circuitry:	Class D
Number of channels:	6CH
Channel EQ:	7 BAND
Max Sound Level(dB/1M):	125dB
Level Adjust Range:	±15dB(80Hz)-Bass±15dB(12KHz)-Treb
Distortion:	Line-0.02%, microphone-0.04%
File system:	FAT12/FAT16/FAT32/EXFAT
MP3 Player USB:	MP3Layar I II III、WAV (PCM,IMA-ADPCM)
EFFECT:	DLEAY
Format:	FAT 16, FAT 32
Lead-acid battery:	12V 7.2AH*2
Battery normal usage time:	4~6Hours
Power Requirements:	Ac:110V~220V 50Hz
Magnet:	Neodymium



PROEURO TECH
PERFORMANCE SOUND



MP-1525

PROFESSIONAL SPEAKER SERIES

FUNCTIONAL OVERVIEW:

Professional 8-channel input, built-in high-efficiency Class D power amplifier, incredibly flat frequency response, digital display, USB player with recording function,Built-in 32-BIT DSP EFFECT, 48V phantom power, built-in Bluetooth, built-in USB wireless microphone input interface, XLR parallel output interface, can expand the audio system

Model	MP-1525 (15’')
Driver Quantity:	15"*1(LOW) 1*34mm(High)
Output power:	350W*2 8Ω
Output Circuitry:	Class D
Frequency response:	45 Hzto 20 KHZ
Max Sound Level(dB/1M):	122dB
Level Adjust Range:	±15dB(80Hz)-Bass±15dB(12KHz)-Treb
Line Channel:	8CH
Channel EQ:	3 BAND
MIC:	4
EFFECT:	32-BIT DSP EFFECT
XLR balanced plug	1
External speaker interface:	one speaker output ports
Output impedance:	8Ω
Power Supply:	220V~,50Hz
Power consumption:	max, 420W
Dimensions(HXLXD mm/pcs):	50.5*43.5*75.5CM



PROEURO TECH
PERFORMANCE SOUND



MP-1523

PROFESSIONAL SPEAKER SERIES

FUNCTIONAL OVERVIEW:

Professional 8-channel input, built-in high-efficiency Class D power amplifier, incredibly flat frequency response, digital display, USB player with recording function,Built-in 32-BIT DSP EFFECT, 48V phantom power, built-in Bluetooth, built-in USB wireless microphone input interface, XLR parallel output interface, can expand the audio system

Model	MP-1523 (15")
Driver Quantity:	15"*1 (LOW) 1*34mm(High)
Output power:	350W*2 8Ω
Output Circuitry:	Class D
Frequency response:	45 Hzto 20 KHZ
Max Sound Level(dB/1M):	122dB
Level Adjust Range:	±15dB(80Hz)-Bass±15dB(12KHz)-Treb
Line Channel:	8CH
Channel EQ:	3 BAND
MIC:	4
EFFECT:	32-BIT DSP EFFECT
XLR balanced plug	1
External speaker interface:	one speaker output ports
Output impedance:	8Ω
Power Supply:	220V~,50Hz
Power consumption:	max, 420W
Dimensions(HXLXD mm/pcs):	50.5*43.5*75.5CM



MP-15

PROFESSIONAL
SPEAKER SERIES



Model	12"	15"
Driver Quantity:	12"x1 (LOW) 1"x34mm(High)	15"x1(Low)1"x 34mm (High)
Frequency response:	50 Hz to 20 KHZ	45 Hzto 20 KHZ
Nominal Impedance:	8Ω	8Ω
RMS:POWER handling:	300W	350W
Max Sound Level(dB/1M):	105dB	122dB
Number of interfaces:	1	1
Dimensions(HXLXD mm/pcs):	460*370*620	500*450*730